





● R-30190

SPECIFICATION:  
 \* Rating: 10-15A 250V AC  
 \* Insulation Resistance: 100MΩ at 500V DC  
 \* Dielectric Strength: 2000V AC 1 minute.  
 \* Body material: P.B.T UL 94V-0  
 \* Approvals:

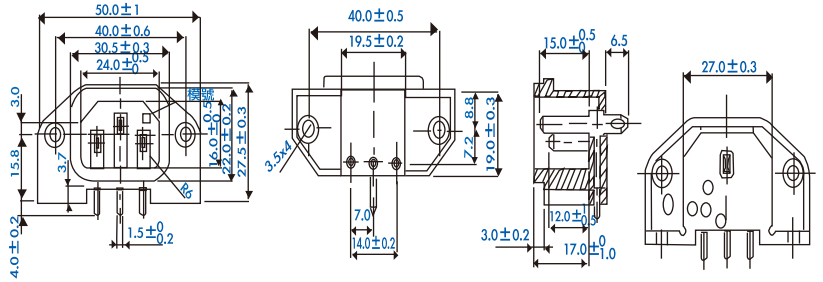



● R-30190(02)

SPECIFICATION:  
 \* Rating: 10-15A 250V AC  
 \* Insulation Resistance: 100MΩ at 500V DC  
 \* Dielectric Strength: 2000V AC 1 minute.  
 \* Body material: P.B.T UL 94V-0  
 \* Approvals:

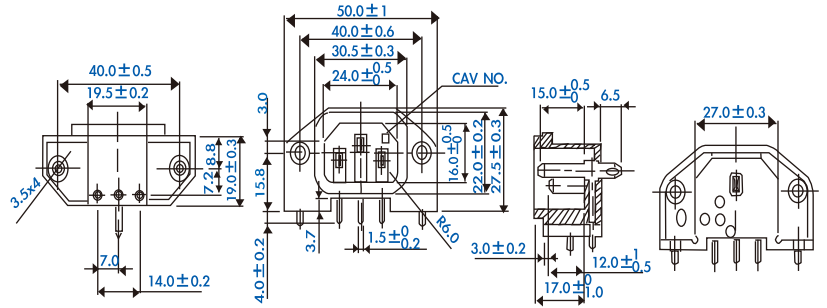

● R-30190(12)

SPECIFICATION:  
 \* Rating: 10-15A 250V AC  
 \* Insulation Resistance: 100MΩ at 500V DC  
 \* Dielectric Strength: 2000V AC 1 minute.  
 \* Body material: P.B.T UL 94V-0  
 \* Approvals:

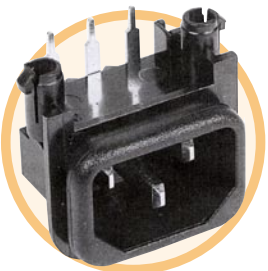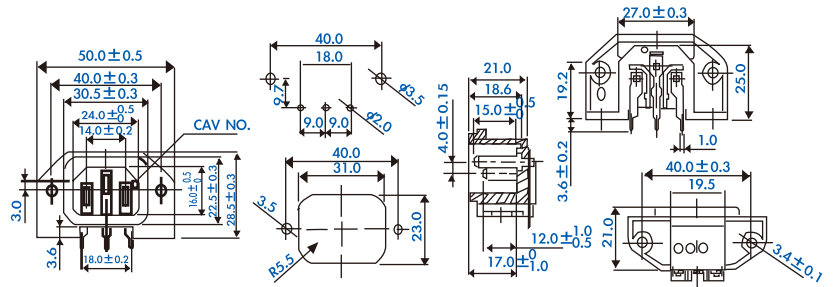

● R-30190(32)

SPECIFICATION:  
 \* Rating: 10-15A 250V AC  
 \* Insulation Resistance: 100MΩ at 500V DC  
 \* Dielectric Strength: 2000V AC 1 minute.  
 \* Body material: Polycarbonate UL 94V-0  
 \* Dielectric Strength : Brass,Nickel Plated.  
 \* Terminals:Brass,Tin Plated.  
 \* Approvals:

